


4



3

2

1

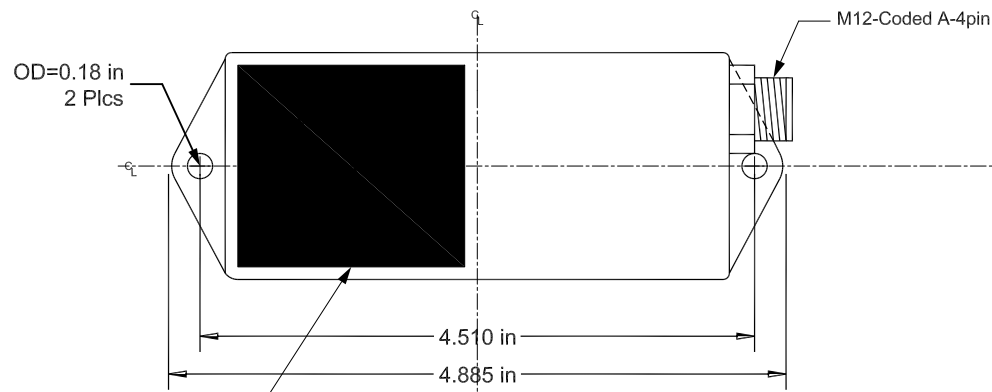

Black Area = READ ZONE

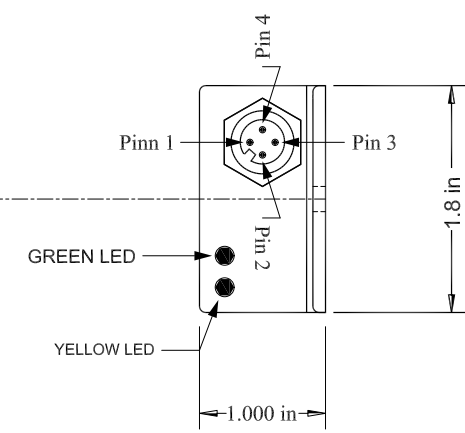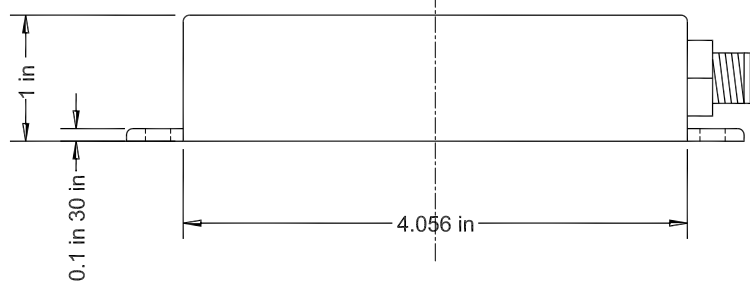

NOTE FOR:
PN: 831-8060-00M124PM
Model HF-5180E-IOLINK
Frequency: 13.56MHZ

M12-A-4PIN WIRING CHART:

Pin 1 = +24VDC
Pin 2 = NC
Pin 3 = 0VDC
Pin 4 = I/O - LINK

LED:
Dual Color: Yellow = Tag Present. Red = Reader Failed

Single Color: Green: Solid = On. Flashing = Linked

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE: FRACTIONS: DECIMALS ANGLES 1/2DEG XXX = 0.005		RFID, INC.		14100 E. Jewell Ave, Suite 12 Aurora, CO 80012.	
		TITLE 831-8060-00M124PM I/O-LINK Flatpack Reader, 24VDC.			
SIZE		CAGE CODE	DWG NO		REV
B			831-8060-00-M124PM-090		0
SCALE		NONE	DO NOT SCALE		SHEET 1 OF 1

4

3

2

1